

JS 200 SERIES

ELECTRICAL PERFORMANCE

Electrical parameters at Standard Test Conditions (STC)					
Module name			YLxxxP-35b 2/3 (xxx=Pmax)		
Power output	P_{max}	W	210	205	200
Power output tolerances	ΔP_{max}	W	±5		
Module efficiency	η_m	%	15.8	15.5	15.1
Voltage at P_{max}	V_{mpp}	V	37.1	36.9	36.9
Current at P_{max}	I_{mpp}	A	5.65	5.55	5.42
Open-circuit voltage	V_{oc}	V	46.6	45.9	45.7
Short-circuit current	I_{sc}	A	5.93	5.77	5.69

STC: 1000W/m² irradiance, 25°C cell temperature, AM1.5g spectrum according to EN 60904-3.
Average relative efficiency reduction of 5% at 200W/m² according to EN 60904-1.

THERMAL CHARACTERISTICS

Nominal operating cell temperature	NOCT	°C	46 +/- 2
Temperature coefficient of P_{max}	γ	%/°C	-0.45
Temperature coefficient of V_{oc}	β_{Voc}	%/°C	-0.37
Temperature coefficient of I_{sc}	α_{Isc}	%/°C	0.06

OPERATING CONDITIONS

Max. system voltage	600 V _{DC}
Max. series fuse rating	10A
Limiting reverse current	Don't apply external voltages larger than Voc of the module
Operating temperature range	-40 - 85°C
Max. static load, front (e.g., snow and wind)	2400Pa
Max. static load, back (e.g., wind)	2400Pa
Max. hailstone impact (diameter / velocity)	25mm / 23m/s

CONSTRUCTION MATERIALS

Front cover (material / thickness)	low-iron tempered glass / 3.2mm
Cell (quantity / material / dimensions)	72 / multicrystalline silicon / 156mm x 104mm
Encapsulant (material)	ethylene vinyl acetate (EVA)
Frame (material / color / anodization color)	anodized aluminum alloy / silver / clear

- Due to continuous innovation, research and product improvement, the specifications in this product information sheet are subject to change without prior notice. The specifications may deviate slightly and are not guaranteed.
- The data do not refer to a single module and they are not part of the offer, they only serve for comparison to different module types.


GENERAL CHARACTERISTICS 1

Dimensions (L / W / H)	1335 mm / 990mm / 40mm
Weight	14.9 kg

PACKAGING SPECIFICATIONS

Number of modules per box	2
Packaging box dimensions (L / W / H)	1350mm / 1005mm / 100mm
Number of modules per box	26
Packaging box dimensions (L / W / H)	1380mm / 1135mm / 1170mm

Unit: mm

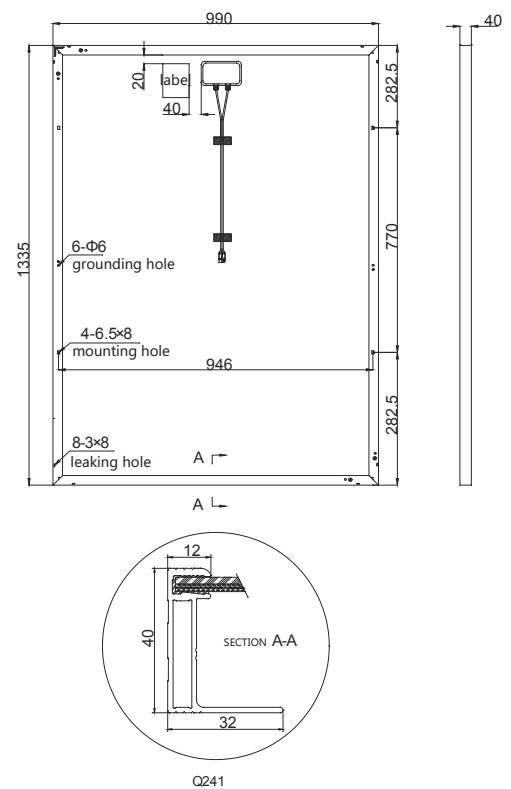

Warning: Read the Installation and User manual in its entirety before handling, installing, and operating Gain Solar modules.

Our Partners:

Baoding Jiasheng Photovoltaic Technology Co., Ltd
 Add: No.333 North Lekai Avenue 071051, Baoding, China
 Email: jsgn@gainsolar.cn
 Web: www.gainsolar.cn
 Service hotline: 0312-8929828
 Fax: 0312-8922529

